

15"



● Specification




Model Name	R15T600-OFCT
Viewable Size Image	15"
Active Display Area(mm)	304.1(H)x228.1(V)
Pixel Pitch(mm)	0.297(H)x0.297(V)
Number of Pixels	1024x768
Contrast Ratio	500:1(typ.)
Display Color	16.2M(6 bits/color+FRC)
Brightness(CD/m ²)	250
Viewing Angel(CR>=10)	-75~75(H);-60~60(V)
Response Time	16ms
Synchronization Range	
Horizontal/Vertical	31.5~68KHz/56~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15pin D-sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	33W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	Resistive, Capacitive, SAW, IR

Remarks: R15T600 series=VGA input only

R15T630 series=VGA+Video input

*Optional infrared touch screen: Requires different mechanical design.

Open Frame LCD

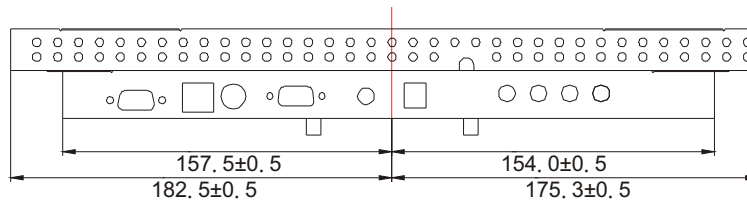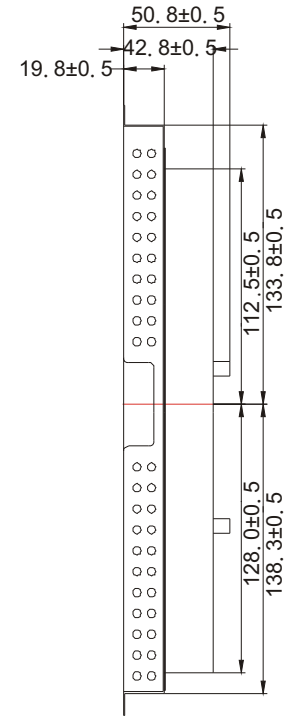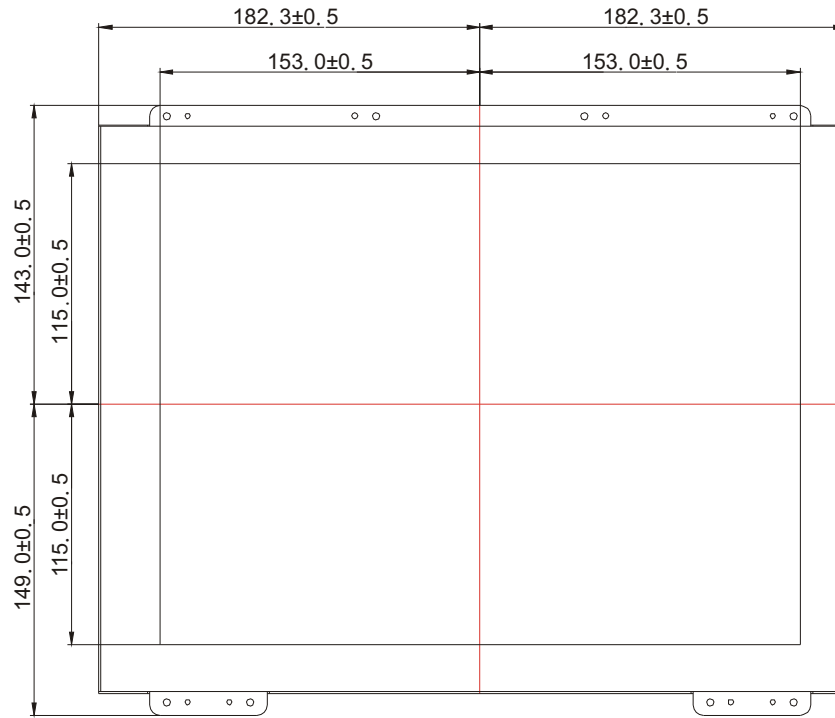

UNIT: mm