

R18T400, R18T430

● Features and Benefits

- Full consideration for touch screen installation and applications
- Slim profile for any space-constricted applications
- Two maximum resolution choices:1024x768
- Flexible choices of touch screen, glass and audio
- Multiple choices of colors for matching up the design of environment
- Flexible A/D board R/D design supporting various panel manufacturer standards
- Hot key design for auto-adjustment
- Hot key design for channel switch to VGA, S-Video and CVBS
- VESA mounting standard for mobile application




● Specification

Model Name	R18T400, R18T430
Viewable Size Image	18"
Active Display Area(mm)	367. 2(H)x275. 4(V)
Pixel Pitch(mm)	0. 3585(H)x0. 3585(V)
Number of Pixels	1024x768
Contrast Ratio	350: 1(typ.)
Display Color	16. 7M(8 bits/colors)
Brightness(CD/m ²)	350
Viewing Angel(CR>= 10)	-75~75(H);-60~50(V)
Synchronization Range	
Horizontal/Vertical	31. 5~68KHz/56~75Hz
Recommended Resolution	1024x768@60Hz, 75Hz
Signal Connector	15pin D-sub
Power Source	AC100~240V, Universal, ±10%
Power Consumption	41W typical, normal operation
Power Management	VESA DPMS Compliant
Plug & Play	VESA DDC 1/2B
Optional Video Input	S-Video, Composite
Optional DVI Input	Yes
Optional Touch Screen	-
Size & Weight	460mm(W)x440mm(H)x192mm(D) Not: 7kg(body), Gross:9. 2kg(body and box)

Remarks: R17L500 series=VGA input only
R17L540 series=VGA+Video input

Mechanical Drawing

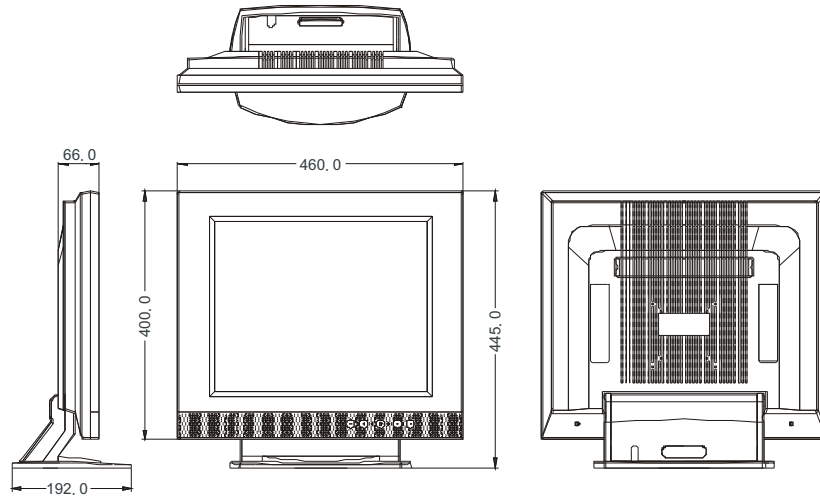

Ordering Information

Model Name	Features		Optional Items			
	VGA	Video	VM	TS or GS	SS	Colors
R18T400	●		●	●	●	○ ● ●
R18T430	●	●	●	●	●	○ ● ●

Optional Item **TS** =Touch Screen

GS =Glass

SS =Stereo

VM =VESA Mounting

Color

○ W=Beige

● B=Black

● S=Silver (Min Order Required)